

Cordless Cap Lamp

Lightweight series – for CHPP and Surface Coal Mines

Features



Two operating modes – Main, Low



Well distributed light pattern



Adjustable beam angle to point wherever you look



Lightweight, comfortable and ergonomic



Made from Top Brand, high quality components and parts



Product Specifications



IP Rating - IP67

Submersible in water up to 1m for 30min



Illumination

2000 Lx Main Mode



Charging Time

7 h



Running Time

20 h Main Mode



Ambient Temperature

-20°C ≤ Ta ≤ 40°C



Weight

119 g



Certifications:

- Certificate #: IECEx TSA 19.0008
- Ex Marking: Ex ia op is I Ma IEC 60079-35-1

Standard #:

- IEC 60079-0
- IEC 60079-11
- IEC 60079-28



Roobuck Pty Limited
Suite 6, 20 West Street
Brookvale, NSW 2100
Australia



+61 2 9938 1550



info@roobuck.com.au



roobuck.com.au
roobuck.com
roobuck.co

CB8 Charging Bank For 8 Cordless Cap Lamps



Features

- Portable, Wall Mountable, Vehicle Installation
- Locking Plate is optional extra (CB8(E)-LPU)
- Charging Connection Indicator
- Automatic over-load protection – cuts off the circuit when Cap Lamp battery is fully charged

Specifications

Input	240 VAC or 12-24 VDC
Dimensions	33 x 21 x 6 cm
Weight	1 kg


CB35/CB53 - Charging Banks For 35/53 Cordless Cap Lamps

Features

- Automatic over-load protection – cuts off the circuit when Cap Lamp battery is fully charged
- Label groove
- Padlock bracket
- Charging Connection Indicator
- Includes wall mounting kit

Specifications

Input	240 VAC	
Dimensions	CB35: 87 x 11 x 56 cm	CB53: 84 x 13 x 110 cm
Weight	CB35: 16 kg	CB53: 31 kg

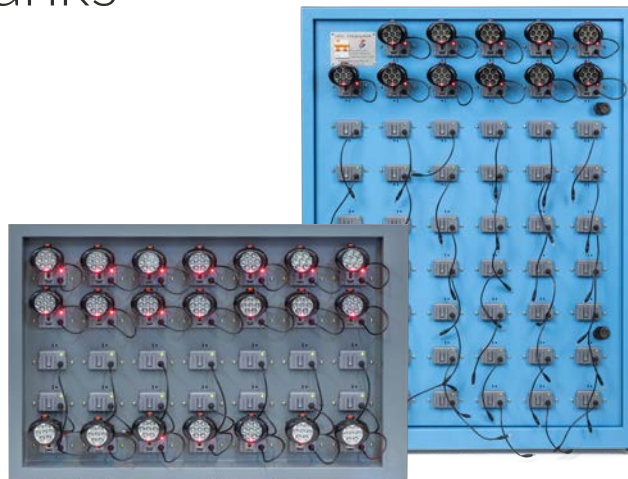

Individual Chargers & Accessories

MC: Single Mains Charger - AU, EU, UK, USA

VC: Single Car Charger - Cigarette Lighter



Roobuck Pty Limited
Suite 6, 20 West Street
Brookvale, NSW 2100
Australia



+61 2 9938 1550



info@roobuck.com.au



roobuck.com.au
roobuck.com
roobuck.co